



KM BAND KNIFE

MODEL : KBK-700 / 900

Knife Speed is controllable as desired according to the type of material with built-in INVERTER SYSTEM



□ KBK-700/900



□ KNIFE SPEED



□ V SHARPENER

FEATURE

1. VARIABLE SPEED CONTROL (INVERTER SYSTEM)

Knife Speed is shown on the Digital Indicator and easily controlled by INVERTER SYSTEM according to they type of material. Inverter Speed Control System provides smooth cutting at the high and low speed.

2. AIR FLOATING TABLE

Air Mat is formed on the table to move cutting material lightly, smoothly and provides easy cutting without collapsing the pile of fabrics.

3. KNIFE COOLING SILICON PACK

Silicon Pack is easily removed and installed. It eliminates the fusion of chemical yarn and interlining cloth yarn.

4. EASY KNIFE EXCHANGE


A Black grip knob at the right of the knife cover provides easy knife installation and removal. Knife is loosened by turning the knob clockwise and tightened by turning counterclockwise.

5. AUTOMATIC SHARPENING SYSTEM

Originally designed Automatic Sharpening Device is equipped. Various grits of sharpening stone are available to the material.

6. CARRYING CASTER

Carrying Caster is equipped for easy removal to meet the requirement of relocation.

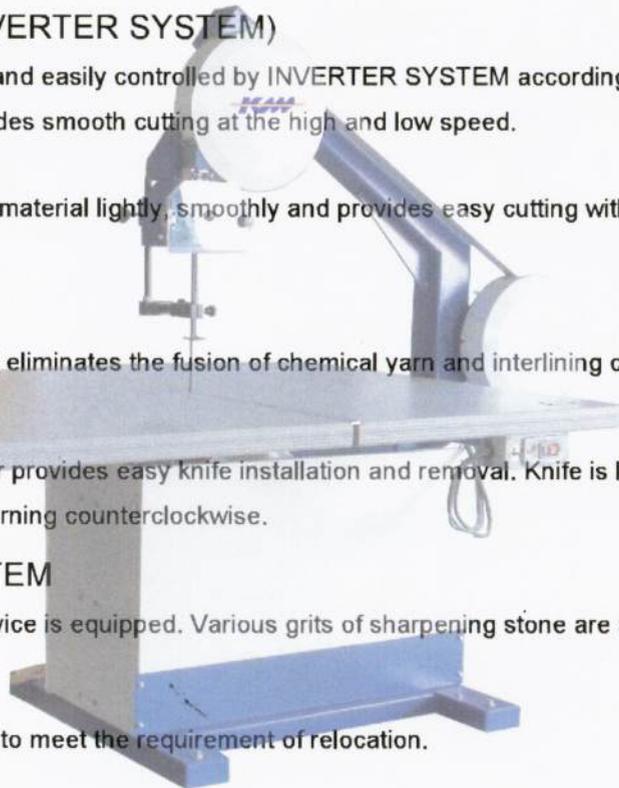

SPECIFICATIONS

| MODEL | | KBK-700 | KBK-900 |
|----------------------|-------------------|------------------------------|------------------------------|
| Cutting Capacity | | 180mm | 180mm |
| Table Size | Standard Large | 1200X1600mm 1500X1800mm | 1500X1800mm 1500X2100mm |
| Table Height | | 720-850 (Adjustable) | 720-850 (Adjustable) |
| Arm Length | | 700mm | 900mm |
| Speed Control | | Variable Speed | Variable Speed |
| Weight | Standard Large | 198kg 208kg | 213kg 218kg |
| Knife Size | | 0.45x10x3500mm | 0.45x10x3860mm |
| Motor / Blower Motor | | 1P 110V/220V 3P 220V/380V | 1P 110V/220V 3P 220V/380V |

*Specifications are subject to change without any notices '09 MAY



Business Office : 7-6, Ryoge, Gifu City, Japan TEL: 81-58-247-8400 . 81-58-245-4501
Singapore Office : TEL: 65-62858131 FAX: 65-62858132
Factory Kunshan : TEL / FAX: 86-512-5777-1838
URL: <http://www.hashima.co.jp>